

ALUMINUM



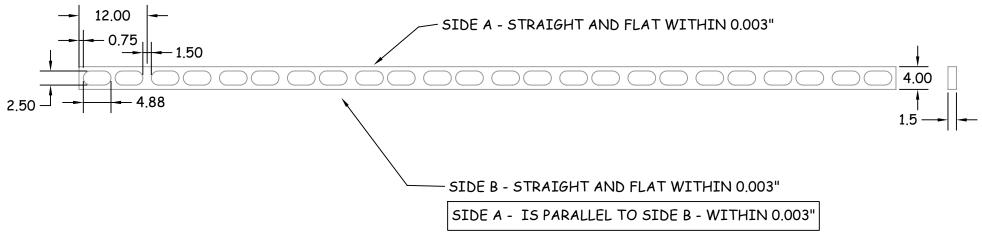

NOTES:

- The straight edge has TWO [144 \times 1.5"] useable edges
- The edges are straight, flat and parallel within 0.003" for 144"
- Above tolerence is .002" for 96" or shorter units
- All other non-working surfaces will be painted
- The unit will be made from Aluminum
- The straight edge will include lightly chamfer edges (45°x .010")
- The unit will be shipped with a certification of inspection
- The straight edge will be marked with a serial number
- -Maximum allowed "Twist" of .125"

ESTIMATED WEIGHT = 48.0 LBS

This straight edge was designed for use with Starrett - Master Precision Level 199Z-50719 [Base is 15" long X 1-5/8" wide]

REVISIONS			PrecisionStraightEdge.com		DATE:	3 APRIL 2018
DATE:	DESCRIPTION	LETTER	PrecisionStraignt	rage.com	DRAWN	BY: DON PETSCH
			P. O. BOX 684 TIPP CITY, OHIO 45371		JOB #:	
					SCALE:	NONE
					DRAWING	3 #: SE144x4x1.5H-AL
			TOLERANCES UNLESS SPECIFIED: 2 PLACE DEC.: +/015	COMPANY:	-	
			3 PLACE DEC.: +/005 4 PLACE DEC.: +/001 ANGLES: +/- 0* 30'	DESCRIPTION: STRAIGHT EDGE 144" OAL		